


HSLCH UV (LIHCH)

Measurement and control cable, 300/500 V
+70 °C service temperature, collective screen, low smoke, zero halogen, fire retardant, UV- and oil-resistant
EN 50575

Application

Collectively screened, zero halogen control cable with improved fire characteristics for various applications. Zero halogen cables are suitable for installation in environments where smoke and toxic fumes may threaten life or valuable equipment. For fixed installation or flexible applications indoors and outdoors, with free movement without forced motion and without tensile stress.

Construction

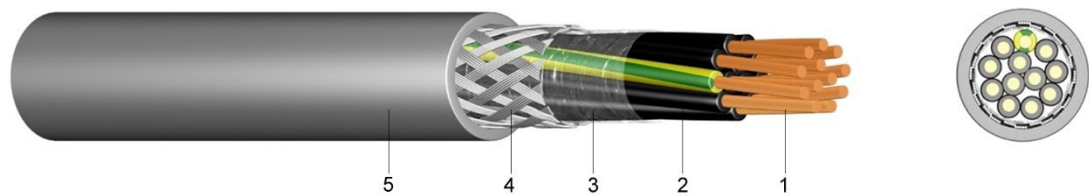

- | | | |
|----------------------|--|--|
| 1. Conductor: | Copper conductor, bare, flexible (class 5) | |
| 2. Insulation: | Zero halogen compound | |
| Core identification: | -JZ: numbered, with green/yellow core | -OZ: numbered, without green/yellow core |
| | -JB: coloured, with green/yellow core | -OB: coloured, without green/yellow core |
| 3. Separator: | Plastic tape (optional) | |
| 4. Screen: | Copper wire braid, tinned | |
| 5. Outer sheath: | Zero halogen compound, grey or green | |

Technical information

Rated voltage	U ₀ /U	300/500 V
Test voltage		2 kV
Max. permissible temperature at conductor		70 °C
Min. operating temperature	fixed installation	-40 °C
	occasional flexing	-5 °C
Min. temperature during installation		-5 °C
Min. bending radius mm	fixed installation	10 x outer diameter in mm
	occasional flexing	20 x outer diameter in mm

Safety parameters

Reaction to fire EN 50399 C_{ca} – s1, d2, a1

Flame spread	single cable	IEC 60332-1-2
	bunched cables	IEC 60332-3-24
Zero halogen		IEC 60754-1 /-2
Smoke density		IEC 61034-1/ -2

Additional parameters

Impact resistant	AG3, AH1
UV resistant	EN 50289-4-17 method A (720h)
Water resistant	AD7
Oil resistant	EN 50290-2-22, AF3

HSLCH UV (LiHCH)

Measurement and control cable, 300/500 V
+70 °C service temperature, collective screen, low smoke, zero halogen, fire retardant, UV- and oil-resistant
EN 50575

N° of cores and cross section mm ²	Outer diameter approx. mm	Copper index approx. kg/km	Weight approx. kg/km
2 x 0,5	5,8	36,0	46
3 G 0,5	6,1	43,0	56
4 G 0,5	6,5	49,0	62
5 G 0,5	7,0	57,0	75
7 G 0,5	7,5	69,0	98
12 G 0,5	9,9	104,0	158
18 G 0,5	11,5	141,0	216
25 G 0,5	13,4	211,0	315
34 G 0,5	15,5	287,0	390
2 x 0,75	6,2	43,0	60
3 G 0,75	6,5	52,0	68
4 G 0,75	7,0	61,0	78
5 G 0,75	7,7	72,0	95
7 G 0,75	8,3	89,0	130
12 G 0,75	10,9	138,0	203
18 G 0,75	12,7	211,0	290
25 G 0,75	14,8	280,0	413
2 x 1	6,5	51,0	66
3 G 1	6,8	62,0	80
4 G 1	7,3	74,0	100
5 G 1	8,1	88,0	130
7 G 1	8,8	112,0	160
12 G 1	11,5	185,0	260
18 G 1	13,9	268,0	382
25 G 1	15,9	354,0	540
2 x 1,5	7,1	65,0	88
3 G 1,5	7,5	82,0	100
4 G 1,5	8,2	100,0	125
5 G 1,5	8,9	119,0	158
7 G 1,5	9,9	154,0	210
12 G 1,5	13,0	268,0	340
18 G 1,5	15,6	373,0	480
25 G 1,5	17,9	530,0	702
2 x 2,5	8,3	96,0	132
3 G 2,5	8,9	118,0	168
4 G 2,5	9,9	147,0	195
5 G 2,5	11,0	176,0	222
7 G 2,5	11,9	253,0	345
12 G 2,5	16,0	385,0	572

HSLCH UV (LiHCH)

Measurement and control cable, 300/500 V
+70 °C service temperature, collective screen, low smoke, zero halogen, fire retardant, UV- and oil-resistant
EN 50575

N° of cores and cross section mm ²	Outer diameter approx. mm	Copper index approx. kg/km	Weight approx. kg/km
3 G 4	10,5	178,0	238
4 G 4	11,6	248,0	305
5 G 4	12,9	269,0	388
7 G 4	14,4	371,0	504
3 G 6	12,7	240,0	328
4 G 6	14,2	343,0	416
5 G 6	15,5	441,0	510
7 G 6	17,0	510,0	670
3 G 10	15,6	350,0	495
4 G 10	17,2	535,0	785
5 G 10	19,5	592,0	855
7 G 10	21,4	820,0	1.308
4 G 16	20,2	800,0	882
5 G 16	22,6	1.050,0	1.293
7 G 16	24,8	1.470,0	2.149
4 G 25	24,9	1.075,0	1.911
5 G 25	27,8	1.446,0	2.414
4 G 35	27,8	1.690,0	2.542
5 G 35	31,5	1.930,0	3.180
4 G 50	39,2	2.315,0	3.550
5 G 50	43,4	2.694,0	4.753
4 G 70	45,3	3.020,0	4.939
5 G 70	49,6	3.696,0	6.572
4 G 95	52,4	4.013,0	6.690
5 G 95	57,5	5.016,0	8.370
4 G 120	56,0	5.067,0	8.453

La version française de cette fiche technique est disponible sur demande.
De technische gegevens zijn op aanvraag in het Nederlands beschikbaar.