

Traction cable

RADOX 4 GKW-AX 1800V MM S

General properties:

Halogen free, electrom-beam cross-linked cables with improved behaviour in case of fire, easy to strip and flexible.

Single and multicore cables, screened (overall screen)

Nominal voltage: 1800 / 3000 V AC


Hazard level: M (extra low temperature, extra oil and extra fuel resistant)

Application:

The cables are intended for permanent installation in rail vehicles or for applications in which a limited alternating bending stress occurs during service.

Guidelines for selection and installation are described in the standards EN 50355 and EN 50343.

General composition of cable:

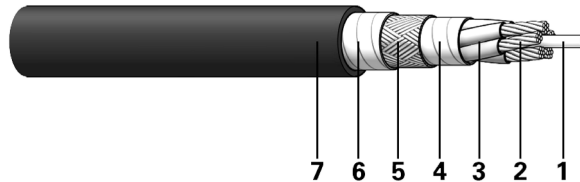

- | | | |
|----|------------------------------|---|
| 1. | Filler (optional) | RADOX 125 REC |
| 2. | RADOX 4 GKW-AX 1800V M cores | Conductor: stranded tin plated copper, acc. to EN 60228 cl. 5 |
| 3. | RADOX 4 GKW-AX 1800V M cores | Insulation: RADOX EI 110 / EI 109 |
| | | Colour: black, numbered |
| 4. | Wrapping | Tape |
| 5. | EMC-screen | Tin plated copper braid |
| 6. | Wrapping | Tape |
| 7. | Sheath | RADOX EM 104, colour: black |

Marking:

[a] HUBER+SUHNER RADOX 4 GKW-AX 1800V [b] MM S [c]-[d] [e] [f] [g]

		example:
[a]	Meter marking (in m)	= 001234 = m
[b]	Construction	2X50
[c]	Part number	12345678
[d]	Batch number	1234567
[e]	Production week and year	03-2017
[f]	Production place (only if China)	CN
[g]	CRCC certification (only if available)	CRCC10218P11529R1M-2

Copyright 2022 HUBER+SUHNER AG. This document may not be amended and its content is confidential. It may not be passed on to third party which are not bound by confidentiality.

The product fulfils the test and specification requirements described in this document for the stated areas of application and operating conditions. HUBER+SUHNER AG does not expressly or implicitly guarantee performance under additional or changed conditions. Deviations are to be agreed upon in writing.

HUBER+SUHNER AG
Low Frequency Division

CH-8330 Pfäffikon



+41 (0)44 952 22 11



+41 (0)44 952 26 40

www.hubersuhner.com

Traction cable

RADOX 4 GKW-AX 1800V MM S

Technical Data:

Voltage rating cond.-earth	U ₀	1800	V AC
Voltage rating cond.-cond.	U	3000	V AC
maximum permissible Voltage rating AC cond.-earth		2100	V AC
maximum permissible Voltage rating AC cond.-cond.	U _m	3600	V AC
maximum permissible Voltage rating DC cond.-earth	V ₀	2700	V DC
maximum permissible Voltage rating DC cond.-cond.		4500	V DC
Test voltage		6500	V AC
Temperature range		- 50 ... + 120	°C
Min. bending radius			
fixed installation	cable diameter ≤ 12 mm	3 x D	
	cable diameter > 12 mm	4 x D	
sporadic movement	cable diameter ≤ 12 mm	4 x D	
	cable diameter > 12 mm	5 x D	

NB:

The upper temperature limit is determined by long term ageing according to EN 50305 Par. 7 and extrapolation to 20,000 hours. The lower temperature limit is determined by bending and elongation tests according to EN 60811-504/505, respectively low temperature behaviour tests for static conditions, e.g. for fixed installation according to GOST 20.57.406-81 - method 204-1 and GOST 17491-80.

The specified bending radii require a careful and proper handling using proven fastening technologies.

The cables are in conformity with:

Fire protection on railway vehicles, hazard level	HL1 - HL3	EN 45545-2
Vertical flame spread	50 mm < L ≤ 540 mm	EN 60332-1-2
Vertical flame spread, bunched, D ≤ 6 mm	L ≤ 1.5 m	EN 50305, 9.1.2
Vertical flame spread, bunched, 6 < D < 12 mm	L ≤ 2.5 m	EN 60332-3-25
Vertical flame spread, bunched, D ≥ 12 mm	L ≤ 2.5 m	EN 60332-3-24
Smoke density	T ≥ 70 %	EN 61034-2
Corrosivity of combustion gases	pH ≥ 4.3, C ≤ 10 µS/mm	EN 60754-2
Amount of halogen acid gas	HCl + HBr ≤ 0.5 %	EN 60754-1
Content of fluorine	HF ≤ 0.1 %	EN 60684-2, 45.2
Toxicity	ITC ≤ 6	EN 50305, 9.2

Fire safety, class	O1.8.1.2.1 (single)	GOST 31565
	P1b.8.1.2.1 (bundle)	
Vertical flame spread	50 mm < L ≤ 540 mm	EN 60332-1-2
Vertical flame spread, bunched	L ≤ 2.5 m	EN 60332-3-22
Corrosivity of combustion gases	pH ≥ 4.3, C ≤ 10 µS/mm	EN 60754-2
Amount of halogen acid gas	HCl + HBr ≤ 0.5 %	EN 60754-1
Toxicity	40 < Tx ≤ 120 g/m ³	GOST 12.1.044-89
Smoke density	T ≥ 60 %	EN 61034-2

Fire protection on railway vehicles	Fulfilled	NFPA 130
Vertical flame spread, bunched	L ≤ 1.5 m	UL 1685, 12 (FT4 exp.)
Smoke density	TSR ≤ 150 m ² , PSRR ≤ 0.40 m ² /s	UL 1685, 12 (FT4 exp.)

Requirement of hazard level code M	(acc. to EN 50264-1 or EN 50306-1)
Extra low temperature	- 40°C
Extra oil resistance	IRM 902, 72h, 100°C
Extra fuel resistance	IRM 903, 168h, 70°C

Traction cable

RADOX 4 GKW-AX 1800V MM S

Table 1:

Construction ¹⁾ n x mm ²	Conductor dia. _{nom} mm	Core dia. ²⁾ nom. mm	Screen nom. dia. cross section		Cable dia. mm	R ₂₀ ³⁾ max. Ω/km	C ⁴⁾ core/ core/ screen pF/m		Fire load nom. kJ/m	Weight _{nom.} copper cable kg/100m		H+S Part No.	
			mm	mm ²			core/ core	screen					
6x0.5	0.9	2.45	8.5	3.8	10.3±0.4	40.1	125	205	1465	6.5	17.2	85 006 150	5)
3x2x0.5	0.9	2.45	11.3	4.5	14.2±0.4	40.1	90	150	2571	7.0	27	85 165 215	
1x1.5	1.5	3.35	3.8	0.9	5.4±0.15	13.7	-	310	375	2.2	5.1	12 556 535	
2x1.5	1.5	3.35	7.3	2.1	9.6±0.3	13.7	135	230	1260	4.8	14	12 552 642	
3x1.5	1.5	3.35	8.0	3.3	10.5±0.4	13.7	140	235	1480	7.2	18	12 566 644	
4x1.5	1.5	3.35	8.9	3.0	11.7±0.4	13.7	135	230	1870	8.3	22	85 023 676	
5x1.5	1.5	3.35	10.5	5.5	13.4±0.4	13.7	130	225	2080	12	30	84 143 442	
6x1.5	1.5	3.35	11.6	6.3	14.6±0.4	13.7	135	230	2730	15	34	12 564 185	
1x2.5	1.9	3.75	5.6	1.5	6.1±0.15	8.21	-	230	450	3.6	7.0	12 556 536	
2x2.5	1.9	3.75	8.3	3.8	10.8±0.4	8.21	155	260	1560	8.1	20	12 583 411	
3x2.5	1.9	3.75	8.9	3.8	11.6±0.4	8.21	150	255	1700	10	23	12 564 186	
4x2.5	1.9	3.75	10.3	5.6	13.0±0.4	8.21	145	250	2095	14	30	12 586 442	
1x4	2.4	4.5	5.0	1.4	6.8±0.15	5.1	-	395	590	4.9	9.3	12 556 537	
4x4	2.4	4.5	12.2	7.1	15.4±0.5	5.1	160	270	3020	21	43	12 568 683	
1x6	2.9	5.2	5.7	1.6	7.7±0.15	3.39	-	420	755	6.7	12	12 556 538	
3x6	2.9	5.2	12.2	7.1	15.4±0.5	3.39	170	285	3080	23	45	12 584 343	
4x6	2.9	5.2	13.9	7.7	17.3±0.5	3.39	170	290	3790	29	56	12 586 443	
1x10	3.9	6.4	7.0	2.1	9.2±0.2	1.95	-	490	1015	11	19	12 556 539	
2x10	3.9	6.4	13.8	7.13	17.2±0.5	1.95	175	300	4087	26	54	85 068 014	
3x10	3.9	6.4	14.8	8.3	18.3±0.5	1.95	210	355	4405	36	66	12 556 070	
4x10	3.9	6.4	16.8	8.9	20.7±0.5	1.95	170	290	5485	84	45	84 109 368	
1x16	5.3	8.4	9.11	3.5	11.3±0.2	1.24	-	535	1550	17	28	12 556 540	
3x16	5.3	8.4	19.4	13.5	23.4±0.5	1.24	200	340	6670	54	103	12 564 357	
4x16	5.3	8.4	22.1	18.0	26.6±0.6	1.24	180	300	8375	72	133	12 584 305	

Traction cable

RADOX 4 GKW-AX 1800V MM S

Construction 1) n x mm ²	Conductor dia. _{nom} mm	Core dia. ²⁾ nom. mm	Screen nom.		Cable dia. mm	R ₂₀ ³⁾ max. Ω/km	C ⁴⁾		Fire load nom. kJ/m	Weight nom.		H+S Part No.
			dia.	cross section			core/ core	screen		copper	cable	
			mm	mm ²			pF/m		kg/100m			
1x25	6.6	10.2	10.9	4.2	13.7±0.3	0.8	-	570	2150	25	41	12 556 541
3x25	6.6	10.2	23.6	19.4	28.4±0.6	0.8	205	350	10065	81	153	12 564 358
4x25	6.6	10.2	27.3	30.6	33.0±0.6	0.8	210	355	13410	116	210	12 563 356
1x35	7.8	11.7	12.4	5.1	15.1±0.25	0.57	-	610	2560	35	54	12 556 542
2x35	7.8	11.7	24.8	19.4	29.8±0.6	0.57	225	380	11870	80	160	12 583 239
3x35	7.8	11.7	26.6	22.2	31.7±0.7	0.57	225	380	12340	112	200	12 561 687
3x35 +10	7.8 3.9	11.7 6.4	27.5	22.2	33.0±0.7	0.57 1.95	210	360	12800	122	214	12 563 359
4x35	7.8	11.7	30.9	33.2	37.2±0.7	0.57	210	360	16480	155	273	12 563 357
1x50	9.3	13.5	14.2	5.8	17.0±0.3	0.39	-	660	3030	53	71	12 556 543
2x50	9.3	13.5	28.9	30.6	34.3±0.6	0.39	240	405	14930	116	217	12 583 154
3x50	9.3	13.5	31.0	30.6	36.9±0.7	0.39	240	400	17035	152	271	85 005 504
3x50 +10	9.3 3.9	13.5 6.4	31.0	33.2	37.0±0.7	0.39 1.95	230	390	13670	172	271	12 563 360
4x50	9.3	13.5	35.1	40.8	41.7±0.7	0.39	235	395	19890	217	360	12 552 458
1x70	11.4	15.8	16.7	8.3	19.5±0.3	0.28	-	760	3680	70	97	12 556 544
2x70	11.4	15.8	33.5	35.8	39.7±0.6	0.28	240	400	20270	159	360	85 002 075
3x70	11.4	15.8	36.0	35.7	41.9±0.7	0.28	265	450	20925	212	359	85 109 070
3x70 +10	11.4 3.9	15.8 6.4	35.9	38.3	41.9±0.7	0.28 1.95	265	450	18740	230	365	12 551 966
4x70	11.4	15.8	41.4	40.8	47.9±0.7	0.28	250	425	25890	289	470	12 557 169
1x95	12.9	17.5	18.6	12.0	21.2±0.3	0.21	-	810	4500	88	120	12 556 545
1G95	12.9	17.5	18.6	12.0	21.2±0.3	0.21	-	810	4500	88	120	85 074 533
1x95	12.9	17.4	18.5	12.0	20.5±0.3	0.21	-	810	4235	88	116	85 150 153 ⁶⁾
3x95	12.9	17.5	39.6	40.8	46.7±0.7	0.21	260	445	22783	278	434	85 074 100
3x95 +10	12.9 3.9	17.5 6.4	39.6	40.8	46.7±0.7	0.21 1.95	260	445	20270	291	438	12 559 402
1x120	14.5	19.8	20.9	13.7	23.6±0.3	0.16	-	860	5040	114	152	12 556 546
1x150	16.0	22.1	23.2	16.0	26.2±0.3	0.13	-	890	6590	143	188	12 556 547
1x185	17.8	24.0	25.1	16.0	28.2±0.3	0.11	-	900	7290	170	220	12 556 548

Traction cable

RADOX 4 GKW-AX 1800V MM S

Construction 1) n x mm ²	Conductor dia.-nom mm	Core dia. ²⁾ nom. mm	Screen nom. dia. cross section		Cable dia. mm	R ₂₀ ³⁾ max. Ω/km	C ⁴⁾ core/ core/ core screen pF/m		Fire load nom. kJ/m	Weight nom. copper cable kg/100m		H+S Part No.
			mm	mm ²			core/	screen				
1x240	20.8	27.0	28.3	20.8	31.4±0.3	0.082	-	995	8215	221	279	12 556 549
1x300	23.0	29.9	31.2	22.2	34.6±0.4	0.065	-	1060	9700	276	345	12 558 471
1x400	26.5	34.1	35.9	35.7	39.5±0.5	0.05	-	1115	15320	380	480	84 134 935

- 1) X: one colour, numbered
G: one green-yellow core, others one colour, numbered
V: various colours
- 2) Core details see H+S Datasheet 543 850
- 3) Conductor resistance at 20 °C according to EN 60228
- 4) Capacity typical value
- 5) SPEC: reduced diameter
- 6) Sheath color: orange