



Traction cable

RADOX EN 50306-4 1E 300V MM

Product description:

RADOX EN 50306-4 1E 300V MM	Multicore cables, unscreened
Nominal voltage:	300 / 500 V AC
Type of installation:	Mechanically exposed
Hazard level:	M (extra low temperature resistant, extra oil and fuel resistant)

General properties:


Halogen-free, electron-beam cross-linked cables with improved behaviour in case of fire, easy to strip, soldering resistant and flexible. Meets the requirements of the EN 50306-4 standard.

Application:

The cores are intended for fixed installation inside railway vehicles or for installation in applications where limited alternating bending stresses occur during operation.

Guidelines for selection and installation are described in the standards EN 50355 and EN 50343.

General composition of cable:

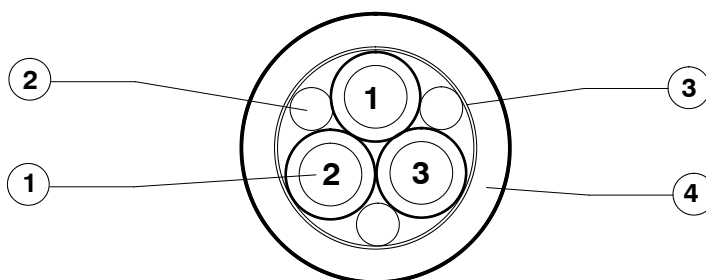

1.	EN 50306-2 300V cores	Conductor:	tin plated copper wire, acc. to EN 50306-2
		Insulation:	RADOX EI 306
		colour:	white, black numbered green-yellow, optional
2.	Filler (optional)		RADOX 125 REC
3.	Wrapping		tape
4.	Sheath		RADOX EM 104, colour: black, yellow marked

Marking:

[a] HUBER+SUHNER RADOX EN 50306-4 1E 300V [b] MM 90 [c]-[d] [e] [f]

		example:
[a]	Meter marking (in m)	= 001234 = m
[b]	Construction	3X1.5
[c]	Part number	12345678
[d]	Batch number	1234567
[e]	Production week and year	03-2017
[f]	Production place (only if China)	CN

Copyright 2019 HUBER+SUHNER AG. This document may not be amended and its content is confidential. It may not be passed on to third party which are not bound by confidentiality.

The product fulfils the test and specification requirements described in this document for the stated areas of application and operating conditions. HUBER+SUHNER AG does not expressly or implicitly guarantee performance under additional or changed conditions. Deviations are to be agreed upon in writing.

HUBER+SUHNER AC
Low Frequency Division

CH-8330 Pfäffikon

+41 (0)44 952 22 11

+41 (0)44 952 26 40

www.hubersuhner.com



Traction cable

RADOX EN 50306-4 1E 300V MM

Technical data:

Voltage rating cond.-earth		U_0		300		V AC
Voltage rating cond.-cond.		U		500		V AC
maximum permissible Voltage rating AC cond.-earth				360		V AC
maximum permissible Voltage rating AC cond.-cond.		U_m		600		V AC
maximum permissible Voltage rating DC cond.-earth		V_0		450		V DC
maximum permissible Voltage rating DC cond.-cond.				750		V DC
Test voltage				2000		V AC

Temperature range - 40 ... + 120 °C

Min. bending radius

fixed installation		cable dia. $\leq$ 12 mm		3 x D
		cable dia. $>$ 12 mm		4 x D
sporadic movement		cable dia. $\leq$ 12 mm		4 x D
		cable dia. $>$ 12 mm		5 x D

NB:

The upper temperature limit is determined by long term ageing according to EN 50305 Par. 7 and extrapolation to 20,000 hours.

The lower temperature limit is determined by bending and elongation tests according to EN 60811-504/505.

The specified bending radii require a careful and proper handling using proven fastening technologies.

The cables are in conformity with:

Fire protection on railway vehicles, hazard level	HL1 - HL3	EN 45545
Vertical flame spread	50 < L ≤ 540 mm	EN 60332-1-2
Vertical flame spread, bunched, D ≤ 6 mm	L ≤ 1.5 m	EN 50305, 9.1.2
Vertical flame spread, bunched, 6 < D < 12 mm	L ≤ 2.5 m	EN 50305, 9.1.1 (EN 60332-3-25)
Vertical flame spread, bunched, D ≥ 12 mm	L ≤ 2.5 m	EN 60332-3-24
Smoke density	T ≥ 70 %	EN 61034-2
Toxicity	ITC ≤ 6	EN 50305, 9.2

Fire protection on railway vehicles, hazard level	1 - 4	DIN 5510
Vertical flame spread	50 < L ≤ 540 mm	EN 60332-1-2
Vertical flame spread, bunched, D ≤ 6 mm	L ≤ 1.5 m	EN 50305, 9.1.2
Vertical flame spread, bunched, 6 < D < 12 mm	L ≤ 2.5 m	EN 50266-2-5 (EN 50305, 9.1.1)
Vertical flame spread, bunched, D ≥ 12 mm	L ≤ 2.5 m	EN 50266-2-4
Smoke density	T ≥ 60 %	EN 61034-2
Corrosivity of combustion gases*	pH ≥ 4.3, C ≤ 10 μS/mm	EN 50267-2-2
Amount of halogen acid gas*	HCl + HBr ≤ 0.5 %	EN 50267-2-1
Content of fluorine*	HF ≤ 0.1 %	EN 60684-2, 45.2
Toxicity, insulation	ITC ≤ 6	EN 50305, 9.2
Toxicity, filler and wrapping	ITC ≤ 3	EN 50305, 9.2
Toxicity, sheath	ITC ≤ 3	EN 50305, 9.2

* Insulation, filler, wrapping and sheath

Fire protection on railway vehicles, category	A1, A2, B	NF F16-101
Fire protection on railway vehicles, class	C / F0	NF F16-101
Vertical flame spread	50 < L ≤ 540 mm	NF C32-070, 2.1
Vertical flame spread, bunched	L ≤ 300 mm	NF C32-070, 2.2
Smoke index	I _F ≤ 5	X10-702-2, NF X70-100-1

Requirement of hazard level code M (according to EN 50264-1 or En 50306-1)

Extra low temperature		- 40°C
Extra oil resistance		IRM 902, 72h, 100°C
Extra fuel resistance		IRM 903, 168h, 70°C

Applicable documents:

- 585 536 Datasheet of cores
- 586 555 Current rating for single core cables



Traction cable

RADOX EN 50306-4 1E 300V MM

Construction ¹⁾ n x mm ²	Conductor Construction n x mm	nom. Dia. mm	Core ²⁾ Dia. nom. mm	Cable dia. mm	R ₂₀ ³⁾ max. Ω/km	Fireload nom. kJ/m	Weight Copper kg / 100m	nom. Cable kg / 100m	H + S Part No.
4x0.5	19 x 0.18	0.9	1.42	5.85±0.3	40.1	505	1.8	5.5	12586075
7x0.5	19 x 0.18	0.9	1.42	6.8±0.3	40.1	720	3.2	8.0	12586076
13x0.5	19 x 0.18	0.9	1.42	8.9±0.3	40.1	1170	5.9	13.5	85198275
19x0.5	19 x 0.18	0.9	1.42	9.55±0.3	40.1	1316	8.1	16.8	85198819
37x0.5	19 x 0.18	0.9	1.42	12.5±0.4	40.1	2193	15.7	29.6	85198820
4x0.75	19 x 0.23	1.1	1.62	6.5±0.3	26.7	640	2.8	7.3	12586080
7x0.75	19 x 0.23	1.1	1.62	7.3±0.3	26.7	775	4.5	9.9	85198821
13x0.75	19 x 0.23	1.1	1.62	9.6±0.3	26.7	1264	8.4	17.0	85198815
19x0.75	19 x 0.23	1.1	1.62	10.7±0.4	26.7	1578	12.2	22.7	85198822
37x0.75	19 x 0.23	1.1	1.62	13.9±0.4	26.7	2563	23.9	40.1	85198823
48x0.75	19 x 0.23	1.1	1.62	15.8±0.5	26.7	3183	31.0	50.8	85198824
4x1	19 x 0.26	1.2	1.77	6.9±0.3	20.0	695	3.6	8.5	12586086
7x1	19 x 0.26	1.2	1.77	7.9±0.3	20.0	915	6.3	12.4	12586087
7G1	19 x 0.26	1.2	1.77	7.9±0.3	20.0	915	6.3	12.4	85007953
13x1	19 x 0.26	1.2	1.77	10.4±0.4	20.0	1390	11.6	21.2	12586088
19x1	19 x 0.26	1.2	1.77	11.5±0.4	20.0	1830	17.0	28.3	12586089
37x1	19 x 0.26	1.2	1.77	15.1±0.5	20.0	3040	33.2	50.8	12586090
4x1.5	19 x 0.31	1.5	2.17	7.9±0.3	13.7	875	5.2	11.5	12586091
7x1.5	19 x 0.31	1.5	2.17	9.0±0.3	13.7	1170	9.1	16.8	12586092
7G1.5	19 x 0.31	1.5	2.17	9.0±0.3	13.7	1170	9.1	16.8	12586099
13x1.5	19 x 0.31	1.5	2.17	12.3±0.4	13.7	2080	17.0	30.1	12586093
19x1.5	19 x 0.31	1.5	2.17	13.5±0.4	13.7	2500	24.9	39.9	12586094
37x1.5	19 x 0.31	1.5	2.17	18.2±0.5	13.7	4380	48.6	73.9	12586095
2x2.5	19 x 0.40	1.9	2.75	8.0±0.3	8.21	935	4.3	11.1	12586096
3x2.5	19 x 0.40	1.9	2.75	8.35±0.3	8.21	991	6.1	13.2	85198825
4x2.5	19 x 0.40	1.9	2.75	9.1±0.3	8.21	1150	8.2	16.2	85198826



Traction cable

RADOX EN 50306-4 1E 300V MM

Customized types:

Meet the requirements of the EN 50306-4, the mechanical data are not listed in the table of the related standard.

Construction ¹⁾ n x mm ²	Conductor Construction n x mm	nom. Dia mm	Core ²⁾ Dia.-nom. mm	Cable dia. mm	R ₂₀ ³⁾ max. Ω/km	Fireload nom. kJ/m	Weight ^{nom.} Copper Cable kg / 100m		H + S Part No.
2x0.75	19 x 0.23	1.1	1.62	5.65±0.3	26.7	470	1.4	5.0	84143033
3x0.75	19 x 0.23	1.1	1.62	5.95±0.3	26.7	515	2.1	6.0	85006859
2x1	19 x 0.26	1.2	1.77	6.0±0.3	20.0	520	1.8	5.8	84105080
3x1	19 x 0.26	1.2	1.77	6.25±0.3	20.0	580	2.7	6.8	85006861
2x1.5	19 x 0.31	1.5	2.17	6.9±0.3	13.7	695	2.6	7.9	85007955
3x1.5	19 x 0.31	1.5	2.17	7.1±0.3	13.7	720	3.9	9.1	85006863
7x2.5	19 x 0.40	1.9	2.75	10.9±0.4	8.21	1660	15.3	25.9	85007965
13x2.5	19 x 0.40	1.9	2.75	15.1±0.4	8.21	2990	28.4	46.8	85007966

- 1) X: one colour, numbered
 G: one green-yellow core, others one colour, numbered
 2) Cores: Tolerances of core diameter see H+S Datasheet 585536
 3) R₂₀: Conductor resistance according to EN 50306-2