


Conecting leads

GENERAL PROPERTIES :

Electron beam crosslinked Isolation; excellent high temperature, low temperature, ozone, weathering and abrasion resistance, small amount of smoke, halogen free, flamm- retardant, soldering iron resistant, easy to strip and process, flexible.

APPLICATION :

For protected and fixed installation inside electrical equipment, especially suitable for the connection of motor windings, switchboards, magnets and transformers.

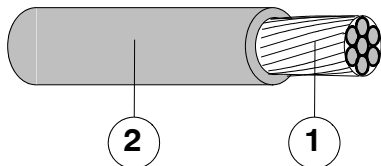

- 1. Conductor: Stranded tin plated copper, EN 60228 / IEC 60228 cl. 5
- 2. Insulation: RADOX 125
 Type EI5 modified, EN 50363- 5
 Type HF90 modified, IEC 60092- 360
 extruded irradiation crosslinked polyolefin
 Colours: see Tables 1+2

TECHNICAL DATA

Temperature range - 40 +125 ... °C
 Maximum permitted operating temperatur of the conductor EN50565/IEC 60092. ... + 90 °C
 Short circuit temperatur rating of the conductor EN50565/IEC 60092 + 250 °C
 Minimum bending radius Outer diameter ≤ 12 mm 3 x D
 Outer diameter > 12 mm 4 x D

Cross- section 0.25 - 0.75 mm²

Rated voltage U₀/U 300/500 V AC
 Maximum permitted operating voltage cond.- earth 320 V AC
 Maximum permitted operating voltage cond.- cond. U_m 550 V AC
 Maximum permitted operating voltage cond.- earth V₀ 410 V DC
 Maximum permitted operating voltage cond.- cond. 820 V DC
 Test voltage 2000(5000) .. V AC (V DC)

Printing: HUBER+SUHNER RADOX 125 1X[**cross section**] 300/500 V -
 [item number]- [batch number] [calender week]- [prod. year] [prod. place]

Divergent 0.25- 0.34mm² black:
 HUBER+SUHNER RADOX 125 1X[**cross section**] 300/500 V - [item number]- [prod. year]

Cross- section 1 - 300 mm²

Rated voltage U₀/U 600/1000 V AC
 Maximum permitted operating voltage cond.- earth 720 V AC
 Maximum permitted operating voltage cond.- cond. U_m 1200 V AC
 Maximum permitted operating voltage cond.- earth V₀ 900 V DC
 Maximum permitted operating voltage cond.- cond. 1500 V DC
 Test voltage 3500(8400) .. V AC (V DC)

Printing: HUBER+SUHNER RADOX 125 1X[**cross section**] 0.6/1 KV HF90 IEC 60332- 3- 22 -
 [item number]- [batch number] [calender week]- [prod. year] [prod. place]

Copyright 2023 HUBER+SUHNER AG. This document may not be amended and its content is confidential. It may not be passed on to third party which are not bound by confidentiality.

The product fulfils the test and specification requirements described in this document for the stated areas of application and operating conditions. HUBER+SUHNER AG does not expressly or implicitly guarantee performance under additional or changed conditions. Deviations are to be agreed upon in writing.

HUBER+SUHNER AG
Low Frequency Division
 CH- 8330 Pfaffikon
 +41 (0)44 952 22 11
 +41 (0)44 952 26 40
www.hubersuhner.com

Conecting leads

TABELLE 1: U₀/U=300/500V

Cross section nom. mm ²	Conductor construction nom. n x mmØ	Conductor diameter max. mm	Insulation thickness nom. mm	Core diameter D mm	R ₂₀ IEC 60228 max. Ω / km	Weight nom. kg / 100m	Colour	H+S Part Nr.
0.25	19 x 0.13	0.61	0.4	1.3 ± 0.10	85.9	0.4	BK WH BU BN GY RD YE VT GN OG GNYE	12519496 12516294 12521082 12519497 12518105 12521067 12519498 12516141 12521066 12521081 12521088
0.34	19 x 0.16	0.77	0.4	1.5 ± 0.10	52.1	0.6	BK WH BU BN GY RD YE GN	12536857 12558211 12537922 85030117 85030122 85030121 85030119 85030120
0.5	19 x 0.18	0.90	0.6	2.0 ± 0.10	40.1	0.9	BK WH BU BN GY RD YE VT GN OG GNYE	12516088 12516080 12521075 12515803 12516087 12516089 12521076 12521069 12516086 12521074 12516091
0.75	24 x 0.20	1.13	0.6	2.25 ± 0.10	26.7	1.2	BK WH BU BN GY RD YE VT GN OG GNYE	12530436 12535952 12530433 12530432 12515493 12515490 12515491 12536734 12515492 12552231 12530434

RADOX 125

Conecting leads

TABLE 2: U₀/U=600/1000V

Cross section nom. mm ²	Conductor construction nom. n x mmØ	Conductor diameter max. mm	Insulation thickness nom. mm	Core diameter D mm	R ₂₀ IEC 60228 max. Ω / km	Weight nom. kg / 100m	Colour	H+S Part Nr.
1	32 x 0.20	1.28	0.7	2.6 ± 0.10	20.0	1.6	BK WH BU BN GY RD YE VT GN OG GNYE	12534452 12012040 12012060 12012050 12505624 12012080 12012090 12505621 12536735 12505622 12012070
1.5	30 x 0.25	1.52	0.7	2.85 ± 0.10	13.7	2.1	BK WH BU BN GY RD YE VT GN OG GNYE	12535840 12528958 12534453 12534455 12534454 12535703 12536736 12536739 12536738 12538161 12536737
2.5	48 x 0.25	2.06	0.7	3.35 ± 0.10	8.21	3.0	BK WH BU BN GY RD YE VT GN OG GNYE	12534456 12535681 12535682 12535684 12535843 12535521 12535714 12538836 12536740 12536516 12535683
4	56 x 0.30	2.64	0.7	3.95 ± 0.10	5.09	4.6	BK WH BU BN GY RD YE GN OG GNYE	12534457 12535911 12536742 12536741 12536745 12536743 12536744 12535912 84093193 12528959
6	82 x 0.30	3.30	0.7	4.65 ± 0.15	3.39	6.5	BK WH BU BN GY RD YE VT GNYE	12560235 12560236 12560230 12560231 12586519 12560234 12560232 84148202 12560233

RADOX 125

Conecting leads

TABLE 2: U₀/U=600/1000V

Cross section nom. mm ²	Conductor construction nom. n x mmØ	Conductor diameter max. mm	Insulation thickness nom. mm	Core diameter D mm	R ₂₀ IEC 60228 max. Ω / km	Weight nom. kg / 100m	Colour	H+S Part Nr.
10	78 x 0.4	4.25	0.7	5.6 ± 0.15	1.95	10.3	BK WH BU BN RD YE GNYE	12560242 12560243 12560238 12582444 12560241 12560239 12560240
16	119 x 0.4	5.40	0.7	6.75 ± 0.15	1.24	15.1	BK WH BU BN GY RD YE GNYE	12560249 12560250 12560244 12584353 12560247 12560248 12560245 12560246
25	189 x 0.4	6.70	0.9	8.5 ± 0.2	0.795	23.9	BK GY RD GN OG GNYE	12560254 85077070 12560253 12581282 84142287 12560252
35	266 x 0.4	7.90	0.9	9.7 ± 0.20	0.565	32.8	BK GY RD GN GNYE	12560256 85077062 85082446 12582833 12560255
50	378 x 0.4	9.30	1.1	11.4 ± 0.20	0.393	46.1	BK WH RD GNYE	12560260 12560261 12560259 12560258
70	348 x 0.50	11.50	1.1	13.8 ± 0.25	0.277	66.2	BK GY RD GNYE	12560265 85076956 12560264 12560263
95	456 x 0.50	13.00	1.1	15.3 ± 0.25	0.210	85.3	BK OG GNYE	12560269 85028249 12560268
120	570 x 0.50	14.70	1.2	17.2 ± 0.30	0.164	108.3	BK GNYE	12560273 12560272
150	722 x 0.50	16.20	1.4	19.1 ± 0.30	0.132	135.3	BK	12560275
185	874 x 0.50	18.00	1.6	21.3 ± 0.30	0.108	166.8	BK GNYE	12560276 84124746
240	1147 x 0.50	21.00	1.7	24.5 ± 0.30	0.0817	216.3	BK	12560277
300	1443 x 0.50	23.20	1.8	27.1 ± 0.40	0.0654	269.2	BK	85102782

RADOX 125

Conecting leads

The cables are in conformity with :

Fire protection in ships 1 - 300 mm²	Fulfilled	IEC 60092
Vertical flame spread of a single cable	50 < L ≤ 540 mm	IEC 60332- 1- 2
Vertical flame spread of bunched cables	L ≤ 2.5 m	IEC 60332- 3- 22
Smoke density	T ≥ 60 %	IEC 61034- 2
Corrosivity of combustion gases	pH ≥ 4.3, C ≤ 10 μS/mm	IEC 60754- 2
Amount of halogen acid gas	HCl+HBr ≤ 0.5%	IEC 60754- 1

Fire protection on railway vehicles,		
Hazard level 0.5 - 240 mm²	HL1 - HL3	EN 45545
Vertical flame spread	50 < L ≤ 540 mm	EN 60332- 1- 2
Vertical flame spread, bunched, D ≤ 6mm	L ≤ 1.5 m	EN 50305, 9.1.2
Vertical flame spread, bunched, 6 < D < 12 mm	L ≤ 2.5 m	EN 50305, 9.1.1
Vertical flame spread, bunched, D ≥ 12 mm	L ≤ 2.5 m	EN 60332- 3- 24
Smoke density	T ≥ 70 %	EN 61034- 2
Toxicity	ITC ≤ 6	EN 50305, 9.2

Fire protection on building products , hazard level

Cross-section 0.5 - 300 mm²	Eca	EN 13501- 6
Flame spread	H ≤ 425 mm	EN 60332- 1- 2

Approvals :

DNV (Det Norske Veritas)	TAE00003GH section range: 1- 300mm2
CPR (Construction Product Regulation) [Prod. plant CH]	according to EN50575 Eca